




1150 VEHICLAR OVERHEAD OPERATOR



low profile
ideal for low clearance
underground parking areas



shock mounts
greatly reduce noise and
vibration from being transferred
into above offices or apartments



limit switches
direct drive are easily adjustable
and don't need to be reset after
power outages



keyed manual
release for heavy-duty trolley in
case of power failure

- Advanced microprocessor control board with built-in operator diagnostics
- Plug-in loop detectors simplify wiring and make installation easy
- Low profile for underground parking applications
- Keyed manual release
- Meets or exceeds the requirements of the UL 325 and 991 safety standards. ETL listed



FEATURES

ACCESS CONTROL SOLUTIONS





The model 1150 overhead gate operator is designed for high traffic underground parking applications serving gated communities, apartment complexes, commercial buildings and industrial sites. This operator is not designed for residential applications and should never be used to operate overhead sectional garage doors.

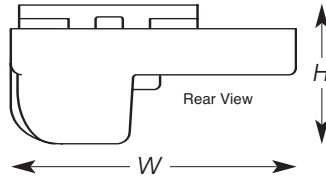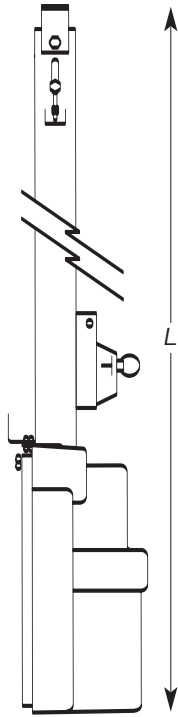

1150 Gate Operator

21" Width (53.3cm)
 10.5" Height (26.67cm)
 149" to 221" Length (378.4cm to 561.3cm)
 [depending on rail length which is determined by gate height]

1150 Specs

Class of operation	Gate Limitations		HP 1/2HP continuous duty	Power 115 VAC, 60 Hz, 5.4A
	max. gate height up to 14 Ft (4.28m)	max. gate width 25-feet* (7.62m)		
II, III, IV				

*Assumes gate is in good condition with properly adjusted hardware. Other external factors may affect the performance of the gate operator.

General Specs

Mechanical

Primary Reduction: 40:1 worm gear running in a continuous oil bath
 Chain: #40
 Speed: Approximately 10 in/sec (254 mm/sec)
 Cover: Charcoal grey polyethylene
 Frame: G90 Galvanized steel to prevent rusting

Manual Release

Fail Secure: Keyed release standard

Advanced Features

Fail-secure, keyed quick release
 Shock mounts
 Programming switches
 Built-in power On/Off switch
 Direct driven limit nuts for precise gate control
 Auto-close timer 1-23 sec
 Ports for plug-in open and reverse loop detectors (DKS detectors only)
 Timer override feature helps prevent tailgating

Options

Gate tracker reporting output provides operator data to access control system (DKS 1838, 1835, 1837, 1838 only)

Safety Standards

Complies with the UL 325 and UL 991 safety standards
 ETL listed

Operating Temp

10°F to 140°F
 -12°C to 62°C

Shipping Weight

Approximately 175-225 lbs (xx kg)

Warranty

5-year limited factory warranty

Distributed by:

DOORKING®, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2006 All Rights Reserved. Product specifications may change without notice. Rev. 6/06

MEMBER:

